


JM-3080 Gas Jet

Get high water flow without a trailer.

The JM-3080 gives you the increased cleaning power of 8 gpm without risking pump damage if your water supply can't match the pump demand. A 12 gallon buffer tank gives you the safety margin you need when using a high flow water jet to clear larger and more difficult lines.

A 614 cc Honda® engine with electric start drives a 3000 psi pump through a 2 to 1 gear reducer. The pump features Vibra-pulse® on demand, to help propel the hose on long runs and around tight bends.

Surprisingly agile for a machine of its size, the JM-3080 is precisely balanced so that with little effort, the machine can be tipped back on its rear wheels to more easily maneuver it into position. A removable 300 ft. capacity hose reel with drag brake, reel lock, and swivel is mounted on a heavy duty frame with four 13" "flat-free" foam core tires. A wheel brake keeps the machine solidly positioned on the job.

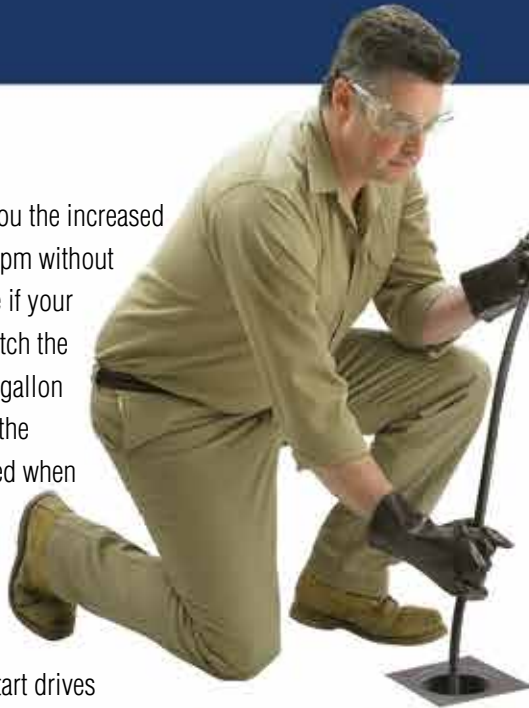

Standard safety features include a thermal relief valve to protect the pump from heat damage, along with a back flow check valve and inlet filter. Complete with tool box and dual-lance spray wand.

JM-3080 Specifications:

Pump: Triplex w/Vibra-pulse®

Pressure: 3000 psi

Flow: 8 gpm

Engine: 614 cc w/Low oil shut off, electric start, and gear reducer

Hose Reel: Removable, swivel, drag brake, and reel lock, 300 ft. x 3/8" hose capacity

Weight: 375 lbs. (170 kg)

Dimensions: 43" L x 29" W x 56" H (109 cm x 74 cm x 142 cm)