

Speedrooter XL[®]


Long Distance Power – Easy Drum Changes

With easily interchangeable drums, the Speedrooter XL gives you long distance clog-busting power in 3" to 10" lines – up to 200 feet. The rugged, easy-to-manuever Speedrooter XL sports a powerful 3/4 hp motor to drive the cable down longer runs and clear tough stoppages.

Change drums to add cable lengths or swap cable sizes with ease. Switch between 3/4" or 5/8" Flexicore cables in the large drum – General's see through inner cage lets you quickly gauge how much cable remains – or substitute the small drum with 100 feet of 1/2" Flexicore cable for smaller lines.

The variable speed Power Cable Feed offers raw driving and pulling power for long, tough jobs. To adjust to each cable size, simply turn a knob on top of the feed – no screwdriver required!

One person can load the Speedrooter XL onto a truck. The machine's frame slides smoothly from the loading wheel, to the handle, to the stair climbers, and finally to the wheels. The adjustable height, sweep-back handles also provide maximum maneuvering leverage.

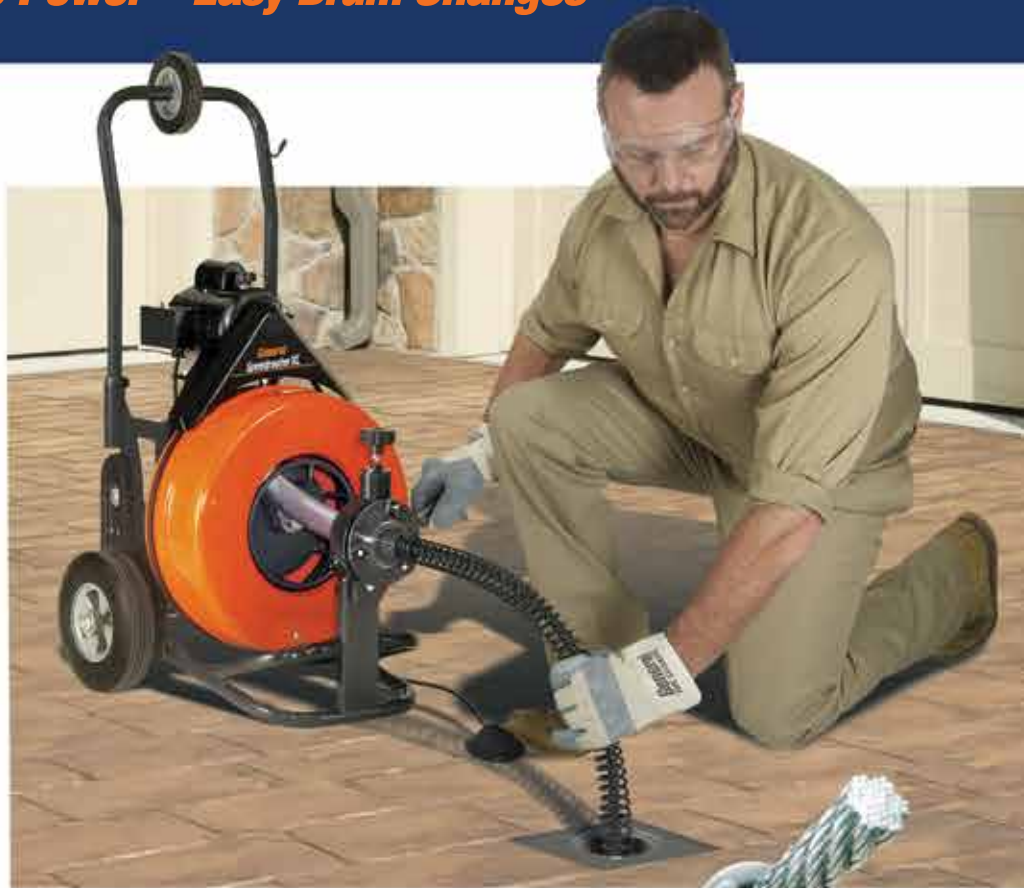

Flexicore[®] Cable



Wire Rope Center Construction

Heavy gauge wire is coiled tightly around 49-strand wire rope and then heat treated. This cable has unequalled strength and the right amount of flexibility. It's so tough it has a one year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870



Truck Loading Wheel

One person easily loads the Speedroooter XL onto a truck. The swept-back handles and loading wheel give you the needed leverage.

Small Drum

Holds up to 100 ft. of 1/2" Flexicore cable.

Specifications:

Weight:

115 lbs. (52 kg) without cable.

Dimensions:

26" deep; 22" wide; 41" high, (66 cm x 56 cm x 104 cm).

Large Drum:

Equipped with inner drum cage and distributor tube.
Holds 100 ft x 3/4" or 5/8" cable.

Small Drum (Optional):

Equipped with inner drum and distributor tube.
Holds 100 ft. x 1/2" cable.

Drum Removal:

Loosen three knobs and lift drum off frame. A smaller V-belt is required for the small drum and is standard with the PSXL-A.

Motor:

3/4 hp with capacitor, forward-off-reverse switch,
20 ft. power cord and ground fault circuit interrupter.

Load Speed:

170 rpm.

Foot Switch:

Pneumatic, with no electrical contact between pedal and motor.

Power Cable Feed:

Drives and retracts at variable speed of up to 20 ft. per minute.

Wheels:

10" Heavy-duty wheels with roller bearings.

Stair Climbers:

Heavy-duty V-belts running on nylon rollers.

Wheel Brake:

Keeps machine in place on the job or in the truck.

Truck Loading Wheel:

Enables one person to lift machine onto bed of truck.

Tool Box:

Attached to rear of machine. Holds all cutters except Flexible Leader.

Leather Gloves:

With double-reinforced palm for hand protection when guiding cable.

Cables:

Left wound Flexicore® wire rope center 3/4" diameter for 4" to 10" lines and 3" lines without sharp bends; 5/8" diameter for 3" to 6" lines. 1/2" diameter for 2" to 3" lines.

Cutters:

See Parts and Accessories on page 30.

