

# Mini-Router XP<sup>®</sup>

**Extra Portability and Performance**


The Mini-Router XP gives you extra portability because 8" semi-pneumatic wheels let you keep the weight on the ground. An easy-grip handle folds down to save space and locks to use as an additional lifting handle.

A roll bar protects the 1/3 hp motor when going up or down stairs. And the power cord and foot pedal can be stowed away on convenient cord wraps.

The XP gives you extra performance and value, enabling you to clear clogged drain lines from 1-1/4" to 4" in diameter with just one machine. The drum easily holds 75 feet of 3/8" or 50 ft. of 1/2" cable and features a free floating inner drum with an integral distributor tube to help prevent cable tangling.

The Mini-Router XP cable with a Power Cable Feed makes a lot of tough jobs go much easier. Even with the power cable feed, the drum is a snap to remove, taking less than a minute.

Of course the XP comes with an air foot pedal and Ground Fault Circuit Interrupter for safety, and General's patented Flexicore wire rope center cable for durability.

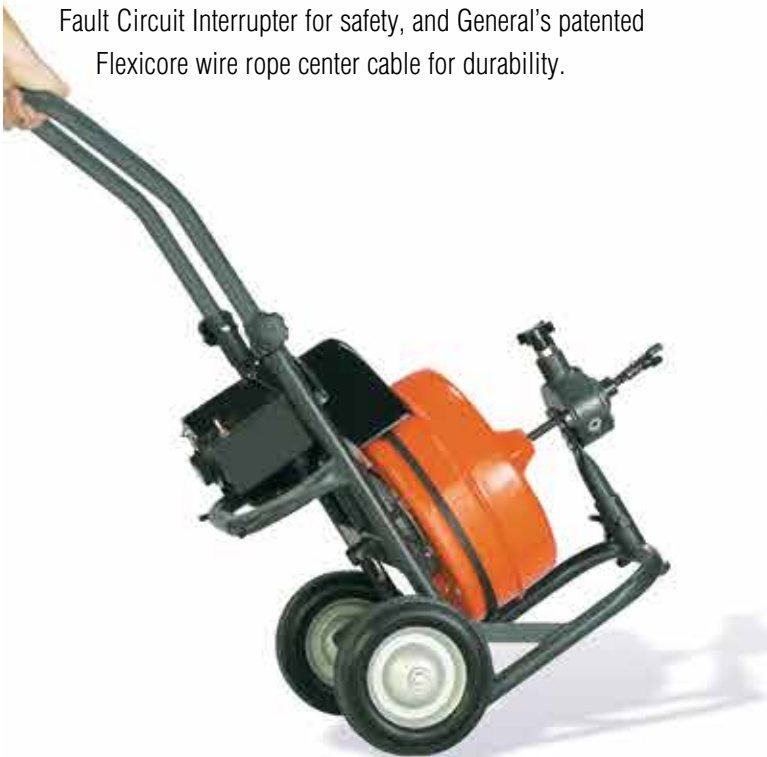

## **Flexicore<sup>®</sup> Cable** **Wire Rope Center Construction**



Heavy-gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870



### Power Cable Feed

A variable speed power cable feed attachment makes feeding and retrieving the cable much easier. It quickly adjusts between 3/8" and 1/2" cables without the need for tools or additional parts.

### Folding Handle

The handle is tall enough to make it easy to move to the job, yet it can be quickly folded to take less room in your truck.



### J-Drum

With a J-Drum, you're ready for small drain work in seconds. Equipped with a patented Quick-Grip™ chuck that tightens firmly on the cable with just a quarter turn. Will hold any Super-Vee cable.

**Catalog Number MR-250**

### Specifications:

#### Weight:

67 lbs. (30 kg) with power feed and without cable.

#### Dimensions:

24" deep x 18" wide x 38" high with handle folded down.  
(61 cm x 46 cm x 96 cm).

#### Drum:

Equipped with inner drum cage and distributor tube to prevent cable tangling under load. Quickly removable from frame.

#### J-Drum:

Capacity of 50 ft. of 1/4" or 5/16" Flexicore cable.

#### Wheels:

8" semi-pneumatic tires with oilite bronze bushings.

#### Folding Handle:

Reduces storage space.

#### Cutter Set:

See page 30.

#### Motor:

1/3 hp with forward-off-reverse switch, spring-loaded mounting for proper belt tension. Load speed 165 rpm.

#### Power Cable Feed:

Drives 1/2" and 3/8" cables.

#### Foot Pedal:

Leaves operator's hands free to control cable. Uses air pressure, so there's no electrical contact between pedal and motor.

#### Power Cord:

10 ft. 3-wire. In-line Ground Fault Circuit Interrupter.

#### Leather Gloves:

With double-reinforced palm, for hand protection when guiding cable.

